



SL-CLASSIC ◀ 120 cm ▶



Safe and approved storage of aggressive, non flammable hazardous materials in working areas

Function / construction:

- **Robust construction and longevity:** cabinet body made of powder-coated sheet steel, safety elements assembled outside the storage compartment for increased protection against corrosion
- **Two in one:** two hermetically separated storage compartments allow the isolated storage of acids and bases in one cabinet
- **No unauthorised use:** doors lockable with profile cylinder (integration in an existing locking system possible)

- **Easy alignment:** adjusting aids to compensate for uneven floor
- **ventilation:** integrated metal-free air ducts ready for connection to a technical exhaust system with only one extraction air inlet

Available equipment:

- Bottom collecting sump PE (V=68 ltr.) with grid
- Shelf with plastic sump (V=33.5 ltr.) and grid
- Storage box for hydrofluoric acid, lockable separately with corrosion-resistant sump
- Pull-out shelves with removable plastic sump

Cabinet for acids and alkalis
SL-CLASSIC model SL.196.120.MV
 light grey (RAL 7035), interior equipment with 12 x pull-out shelf (panel melamine resin-coated/PP)
Order No. 30606-001-30608



Are you aware of our FlameFlex and ChemFlex cabinets?

Safety storage cabinets and recirculating air filter system — all in one!
 Avoid complex wall and ceiling openings and long exhaust air ducts.

Further information on these models from page 448



Drawer
 Sturdy construction with removable plastic sump




Sump pallet
 For the storage of bulk containers, available as fixed storage level with plastic sump (V=33.5 ltr.) or bottom collecting sump (V=68 ltr.)

SL.196.120.MV
standard storage heights for pull-out shelves

Pull-out shelves/number	6	5	4
Distance 6 (mm)	260		
Distance 5 (mm)	280	260	
Distance 4 (mm)	280	280	420
Distance 3 (mm)	310	280	420
Distance 2 (mm)	280	470	470
Distance 1 (mm)	280	420	420




Storage box for hydrofluoric acid
 Safe storage of dangerous hydrofluoric acid in separately lockable storage box, including a corrosion-resistant polypropylene sump

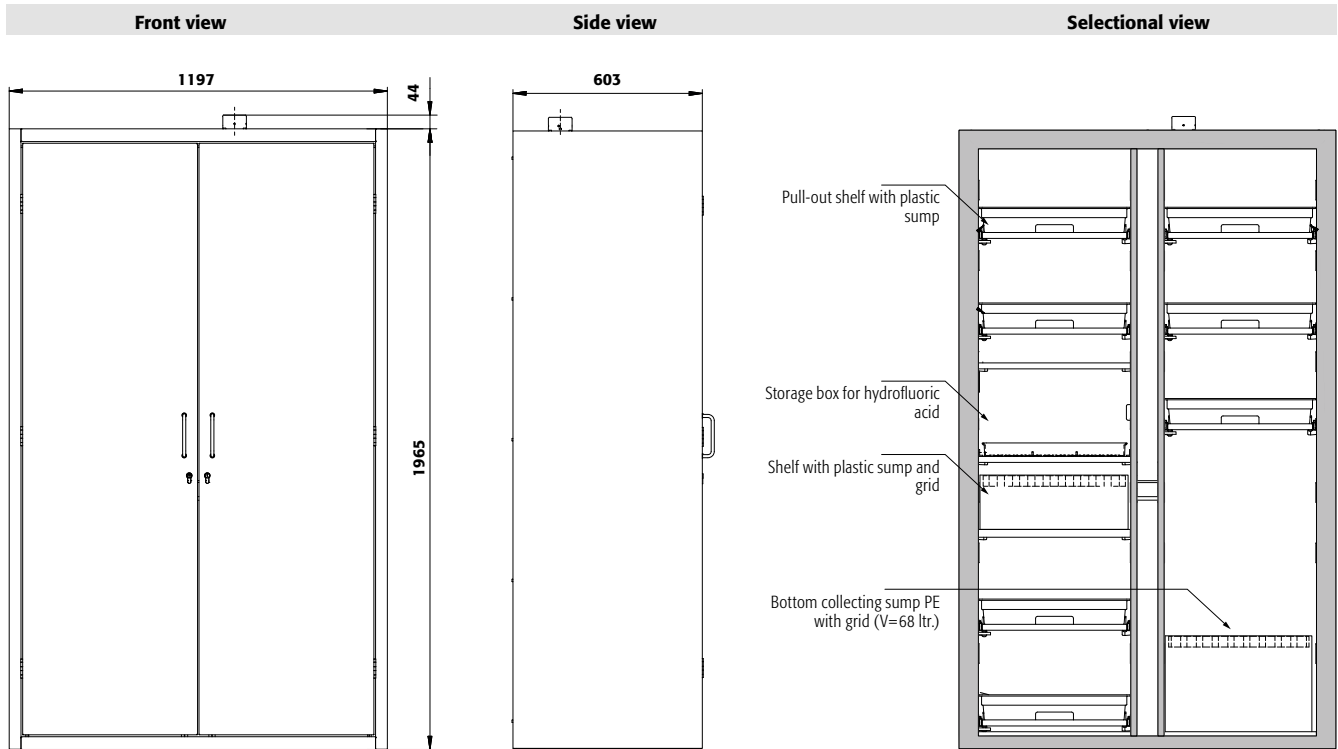

SL-LINE

Technical data	SL.196.120.MV
External dimensions W x D x H	mm 1197 x 603 x 1965
Internal dimensions W x D x H	mm all compartments: 485 x 570 x 1869
Extraction air	DN 75
Weight without interior equip.	kg 160
Air change 30 times	m ³ /h 16
Diff. pressure (air change 30 times)	Pa 56
Distributed load	kg/m ² 240
Maximum load	kg 300

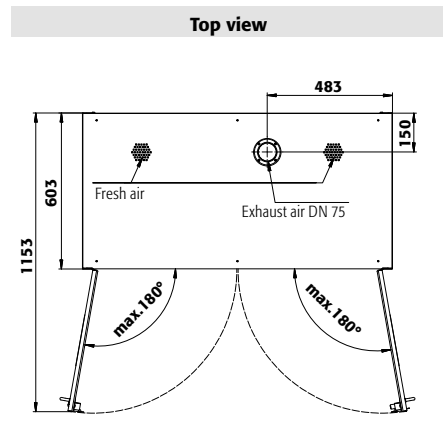

Available colours:



Order example - how to order correctly



Model	Information / equipment	Order No.	
SL.196.120.MV	without interior equipment, with vertical dividing wall	30606	
Body colour	Door colour	Order No.	
Light grey RAL 7035	light grey RAL 7035	001 4	
Laboratory white (sim. RAL 9016)	laboratory white (sim. RAL 9016)	005 4	
Interior equipment packages (can only be ordered in combination with the cabinet)	Material	Order No.	
Left: 4x pull-out shelf (V=11.0L) Right: 4x pull-out shelf (V=11.0L)	panel melamine resin-coated/PP grey	30607 2	
Left: 6x pull-out shelf (V=11.0L) Right: 6x pull-out shelf (V=11.0L)	panel melamine resin-coated/PP grey	30608 2	
Left: 4x pull-out shelf (V=11.0L), 1x storage box for hydrofluoric acid (V=7.0L) Right: 4x pull-out shelf (V=11.0L)	panel melamine resin-coated/PP grey, panel melamine resin-coated/PE grey	37223 6	
Left: 4x pull-out shelf (V=11.0L), 1x storage box for hydrofluoric acid (V=7.0L) Right: 5x pull-out shelf (V=11.0L)	panel melamine resin-coated/PP grey, panel melamine resin-coated/PE grey	37224 6	
Left: 5x pull-out shelf (V=11.0L), 1x storage box for hydrofluoric acid (V=7.0L) Right: 6x pull-out shelf (V=11.0L)	panel melamine resin-coated/PP grey, panel melamine resin-coated/PE grey	37225 6	
Interior equipment	Material	W x D x H (mm)	Order No.
Sump pallet on shelf with grid	PE	459 x 555 x 167*	70.00 33.50 30.45 30610 2
Sump pallet with grid	PE	454 x 538 x 314*	68.00 61.82 30611 6
Pull-out shelf with PP-sump	panel melamine resin-coated/PP grey	407 x 468 x 80*	25.00 11.00 10.00 30609 2
Document holder DIN A5	polystyrene		30793 2
Accessories	Order No.		
Extraction unit without exhaust air monitoring	14218 2		

* usable storage space W x D (mm)
1) load capacity (kg), 2) retention capacity (ltr), 3) maximum container volume in the cabinet (ltr)